



SN-NVR2532E2

32CH 2HDD NVR




Key Features

- Up to 32ch IP cameras access
- Up to 8MP resolution recording
- 2 SATA hard disk up to 8TB
- 2 RJ45 10M/100M/1000M network interface
- Smart search & playback
- 8ch alarm In/1ch alarm Out
- 1ch audio I/O

Specification

Video Input		Storage	
IP Camera Input	32 Channel	HDD	2 SATA Ports, up to 8TB for each HDD
Incoming Bandwidth	160 Mbps	eSATA	N/A
Outgoing Bandwidth	80 Mbps	Cloud Storage	N/A
Video Output		Interface	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024	Audio I/O	1/1
VGA Output	1920×1080, 1440×900, 1280×1024	Alarm Input	8ch
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1	Alarm Output	1ch
Dual Stream	Support	USB	2 ports (USB 2.0 × 2)
Multi-screen Display	1/4/9/16	General	
Recoding		Power Supply	DC12V/4A
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.	Power Consumption	< 5 W (without HDD)
Recording Mode	Manual, Schedule (Regular, Continuous), Event	Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Trigger Events	Motion Detection, Video Loss, Alarm in	Storage Conditions	Less than 90% RH
Playback and Backup		Certifications	CE/FCC
Sync Playback	16/9/4/1	Dimensions	372 × 310.5 × 46.5 mm (16.65 × 12.2 × 2.2 inch)
Search Mode	Time /Date, Alarm, Picture grid, Event	Net Weight	2.1 kg (4.63 lb) without HDD
Backup Mode	USB Device, Network		
Network			
Interface	2 RJ-45 port (10/100/1000 Mbps)		
PoE	N/A		
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE		
Remote Users	8 users		
Smart Phone	iPhone, iPad, Android		
Interoperability	ONVIF, SDK		

Dimensions (mm)

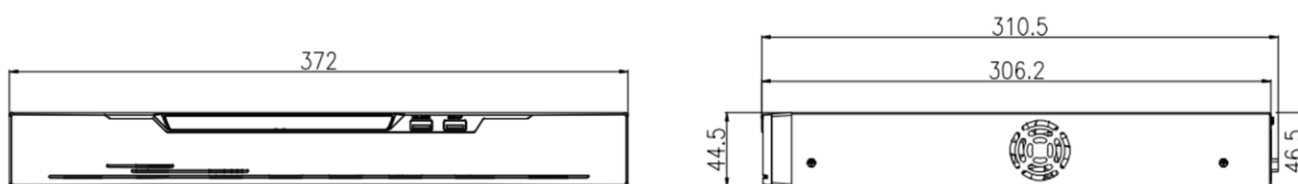

Rear Panel

