



# SN-NVR3516E2-P16

16CH 2HDD NVR with 16CH PoE




## Key Features

- Up to 16ch IP cameras access
- Up to 8MP resolution recording
- 2 SATA hard disk up to 8TB
- 1 RJ45 10M/100M/1000M network interface
- 16ch POE ports
- Smart search & playback
- Support cloud upgrade

# Specification

Video Input		Storage	
IP Camera Input	16 Channel	HDD	2 SATA Ports, up to 8TB for each HDD
Incoming Bandwidth	112 Mbps	eSATA	N/A
Outgoing Bandwidth	112 Mbps	Cloud Storage	Support
Video Output		Interface	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024	Audio I/O	1/1
VGA Output	1920×1080, 1440×900, 1280×1024	Alarm Input	8ch
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1@30fps	Alarm Output	2ch
Dual Stream	Support	USB	3 ports (USB 2.0 × 3)
Multi-screen Display	1/4/9/16	General	
Recoding		Power Supply	AC100 ~ 240V
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.	Power Consumption	< 5 W (without HDD)
Recording Mode	Manual, Schedule (Regular, Continuous), Event	Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS	Storage Conditions	Less than 90% RH
Playback and Backup		Certifications	CE/FCC
Sync Playback	16/9/4/1	Dimensions	372 × 310.5 × 46.5 mm (16.65 × 12.2 × 2.2 inch)
Search Mode	Time /Date, Alarm, Picture grid, Event	Net Weight	2.75 kg (6.05 lb) without HDD
Backup Mode	USB Device, Network		
Network			
Interface	1 RJ-45 port (10/100/1000 Mbps)		
PoE	16 Ports (IEEE 802.3af), 128W		
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE		
Remote Users	8 users		
Smart Phone	iPhone, iPad, Android		
Interoperability	ONVIF, SDK, CGI		

## Dimensions (mm)

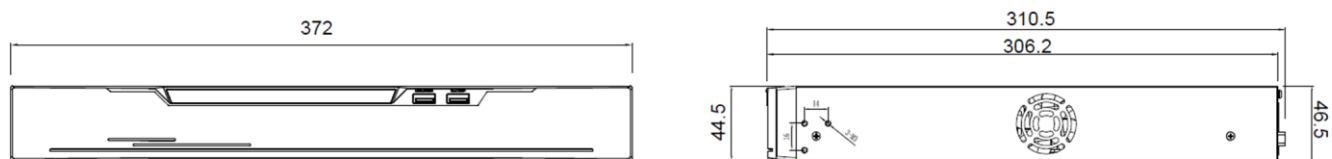

## Rear Panel

