



SN-NVR3504E1-P4

4CH 1HDD NVR with 4CH PoE





Key Features

- Up to 4ch IP cameras access
- Up to 8MP resolution recording
- 1 SATA hard disk up to 8TB
- 1 RJ45 10M/100M network interface
- 4ch POE ports
- Smart search & playback
- Support cloud upgrade

Specification

Video Input		Storage	
IP Camera Input	4 Channel	HDD	1 SATA Ports, up to 8TB for each HDD
Incoming Bandwidth	40 Mbps	eSATA	N/A
Outgoing Bandwidth	40 Mbps	Cloud Storage	Support
Video Output		Interface	
HDMI Output	3840x2160, 1920x1080, 1440x900, 1280x1024	Audio I/O	1/1
VGA Output	1920x1080, 1440x900, 1280x1024	Alarm Input	4ch
Decoding Capacity	1ch 8MP, 4ch 1080P@30fps	Alarm Output	1ch
Dual Stream	Support	USB	3 ports (USB 2.0 x 3)
Multi-screen Display	1/4	General	
Recoding		Power Supply	DC48V/1.25A
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.	Power Consumption	< 5 W (without HDD)
Recording Mode	Manual, Schedule (Regular, Continuous), Event	Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS	Storage Conditions	Less than 90% RH
Playback and Backup		Certifications	CE/FCC
Sync Playback	4/1	Dimensions	255 x 237 x 47.5 mm (10.04 x 9.33 x 1.87 inch)
Search Mode	Time /Date, Alarm, Picture grid, Event	Net Weight	0.9 kg (1.98 lb) without HDD
Backup Mode	USB Device, Network		
Network			
Interface	1 RJ-45 port (10/100 Mbps)		
PoE	4 Ports (IEEE 802.3af), 32W		
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE		
Remote Users	8 users		
Smart Phone	iPhone, iPad, Android		
Interoperability	ONVIF, SDK, CGI		

Dimensions (mm)

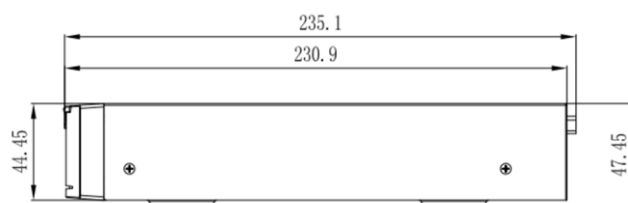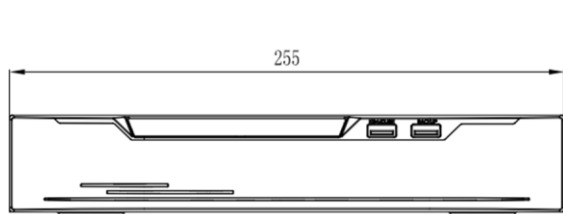

Rear Panel

